

TFC 140 - 230




Standard Equipment


- 3 points ISO universal hitch with 2nd category fork
- Gearbox with free wheel 540', 1 pto, mod. Vigolo L810
- Counter-knife
- Manual side shift
- Rotor with increased height from the ground
- Rear wheels adjustable in height and width
- Opening rear door for maintenance
- Direct cardan shaft (tractor side fork 1" 3/8 Z6)
- Side protection blades
- Front protection chains
- EC guard kit

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
Via dell'Industria, 27/A
36045 Alonte (VI) - ITALY
Tel. +39 0444 436247
Fax +39 0444 436237
www.vigolo.com - info@vigolo.com



Mod.	 Lavoro	 Ingombro	 HP min - max	 Kg	 mm	 mm	 mm	 mm	 ± 125	 mm
TFC 140	1400	1560	30-120	610	28	14	18	18	± 125	3
TFC 150	1500	1660	30-120	630	30	15	20	20	± 125	3
TFC 160	1600	1760	35-120	660	32	16	20	20	± 125	3
TFC 200	2000	2160	40-120	700	40	20	26	26	± 125	4
TFC 230	2300	2460	50-120	730	48	24	30	30	± 125	4

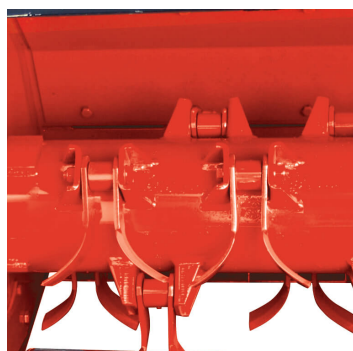

VIGOLO Srl Unipersonale

Dir. e Coord. di Vigolo Flavio Holding Srl Unipersonale
 Via dell'Industria, 27/A
 36045 Alonte (VI) - ITALY
 Tel. +39 0444 436247
 Fax +39 0444 436237
www.vigolo.com - info@vigolo.com